

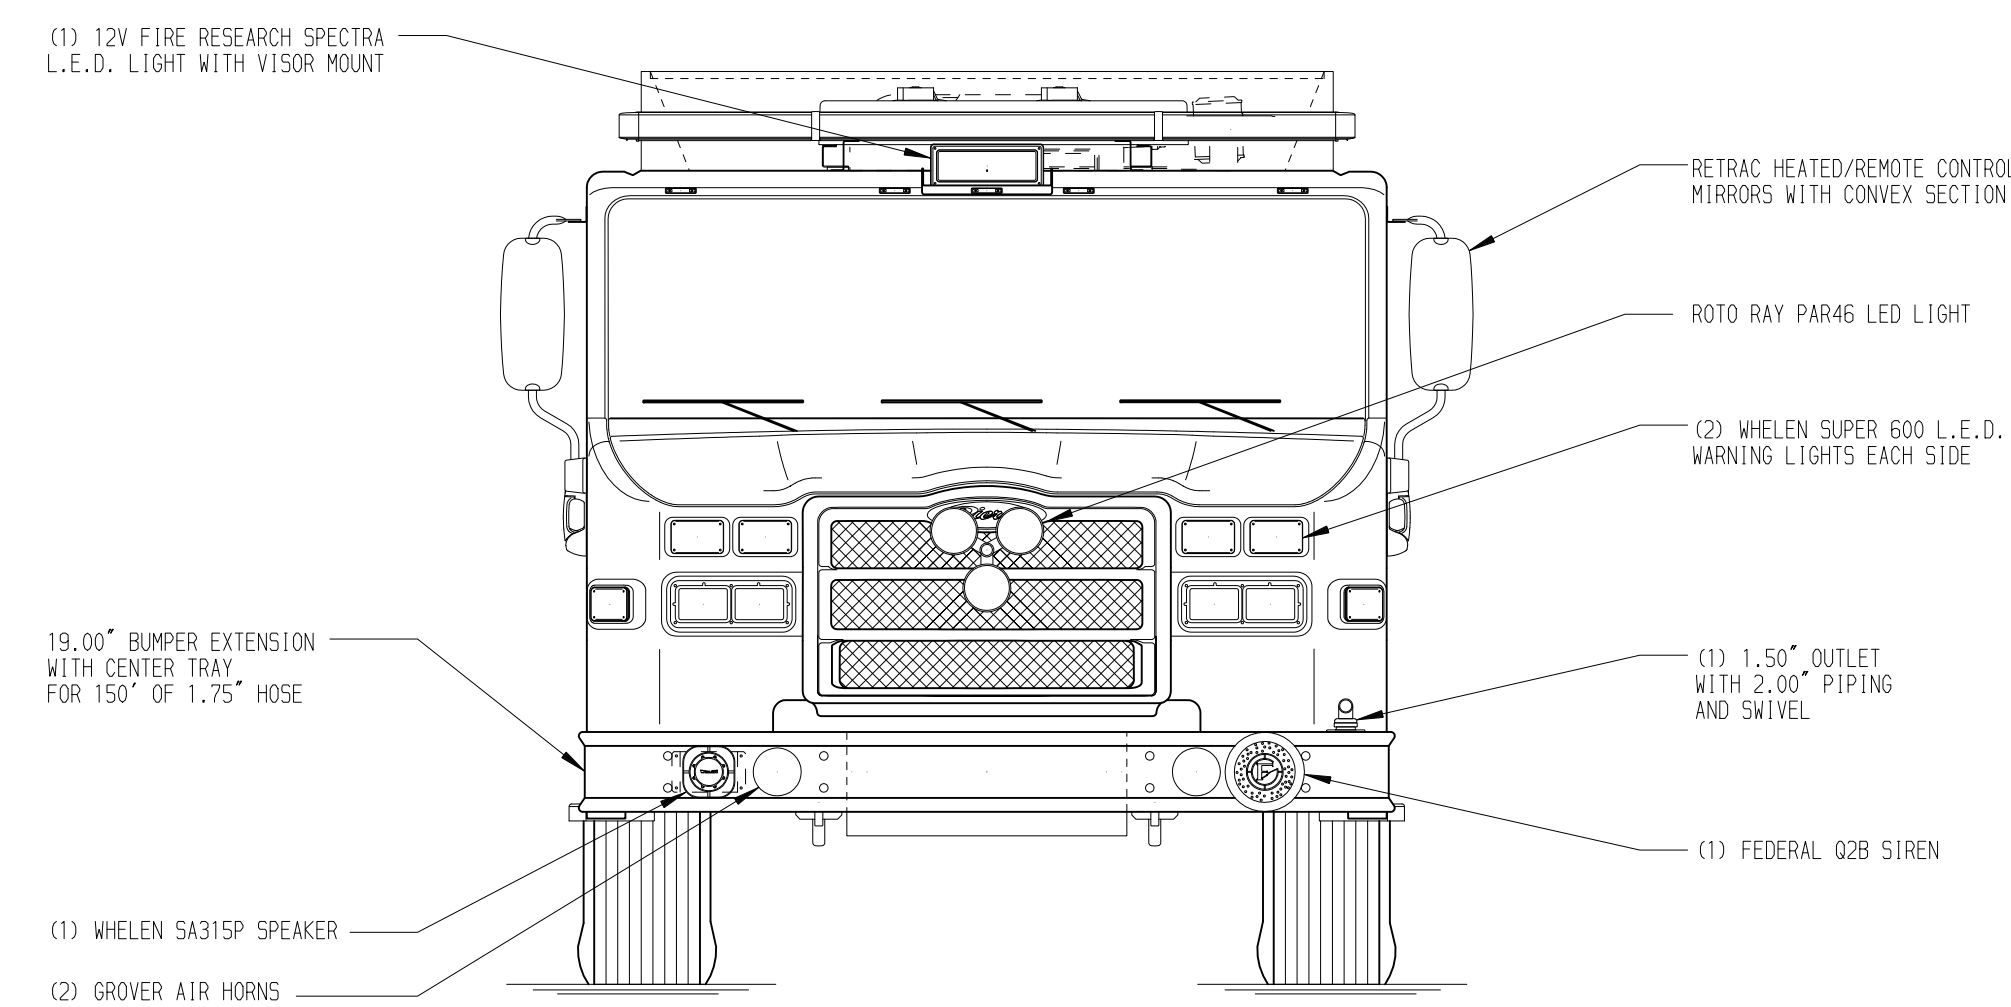


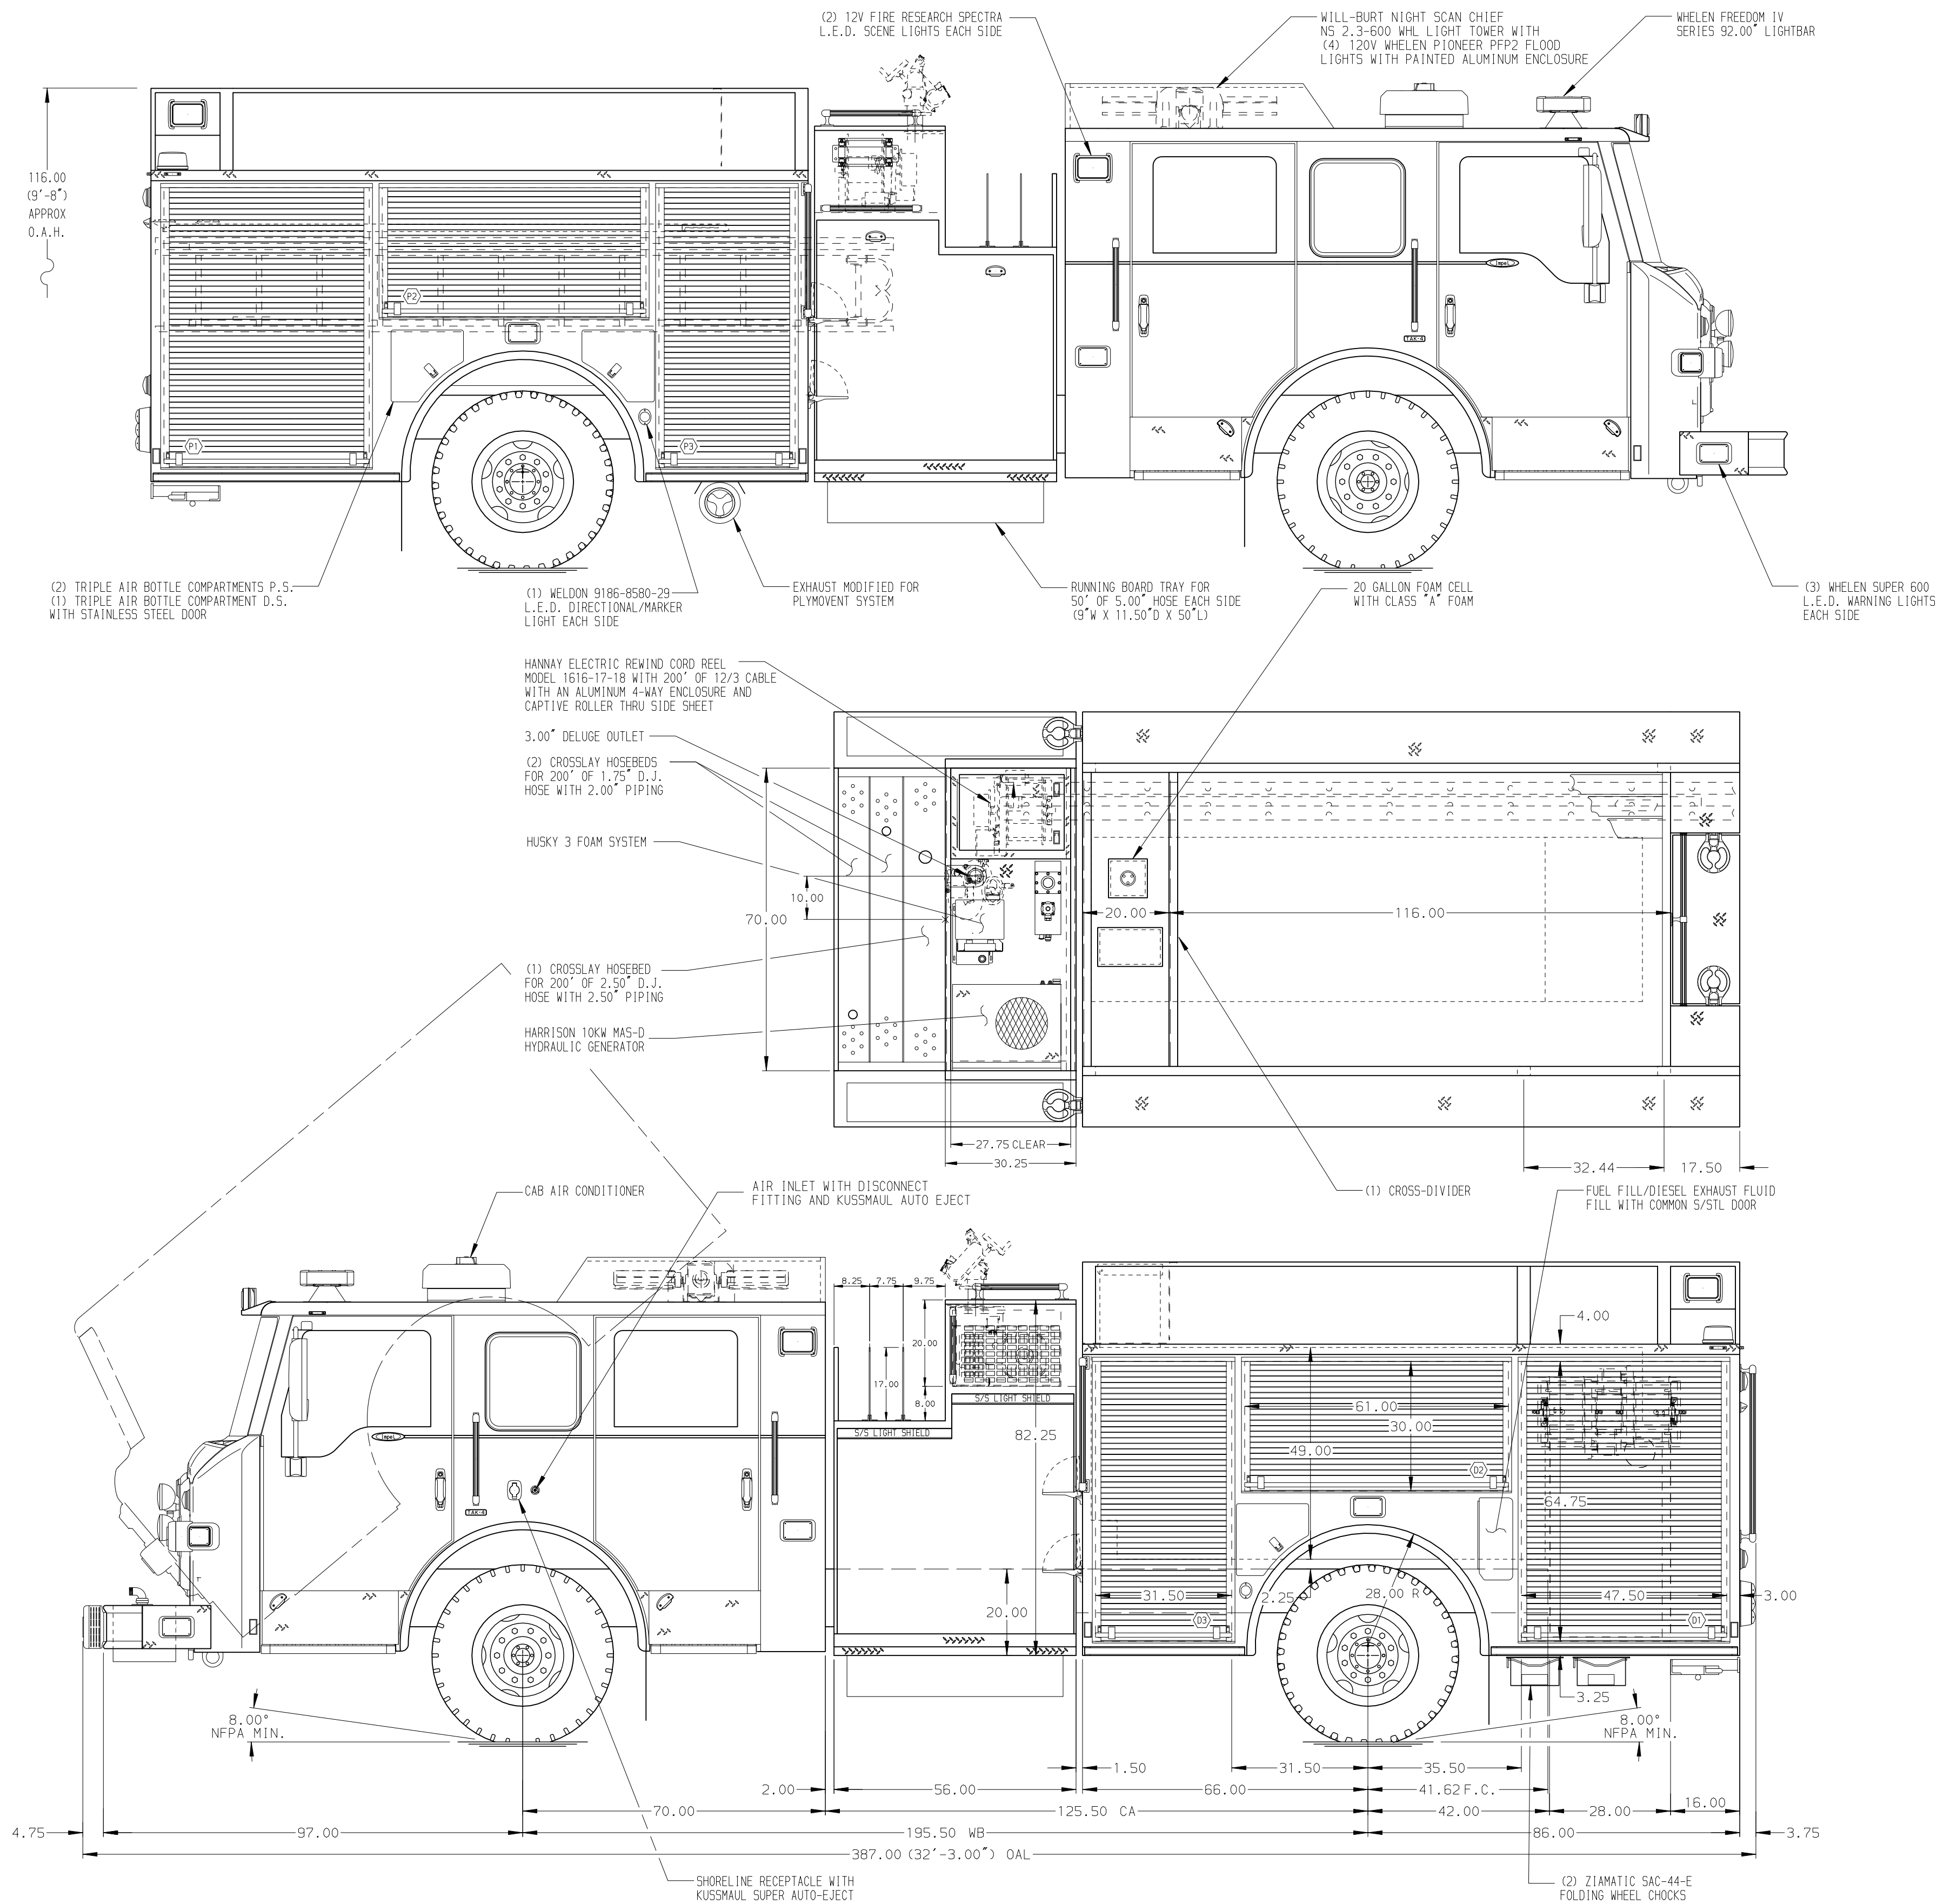

HOSEBED CAPACITIES	
①	- 400' OF 2.50" D.J. POLY HOSE
②	- 1000' OF 5.00" D.J. POLY HOSE
③	- 600' OF 2.50" D.J. POLY HOSE

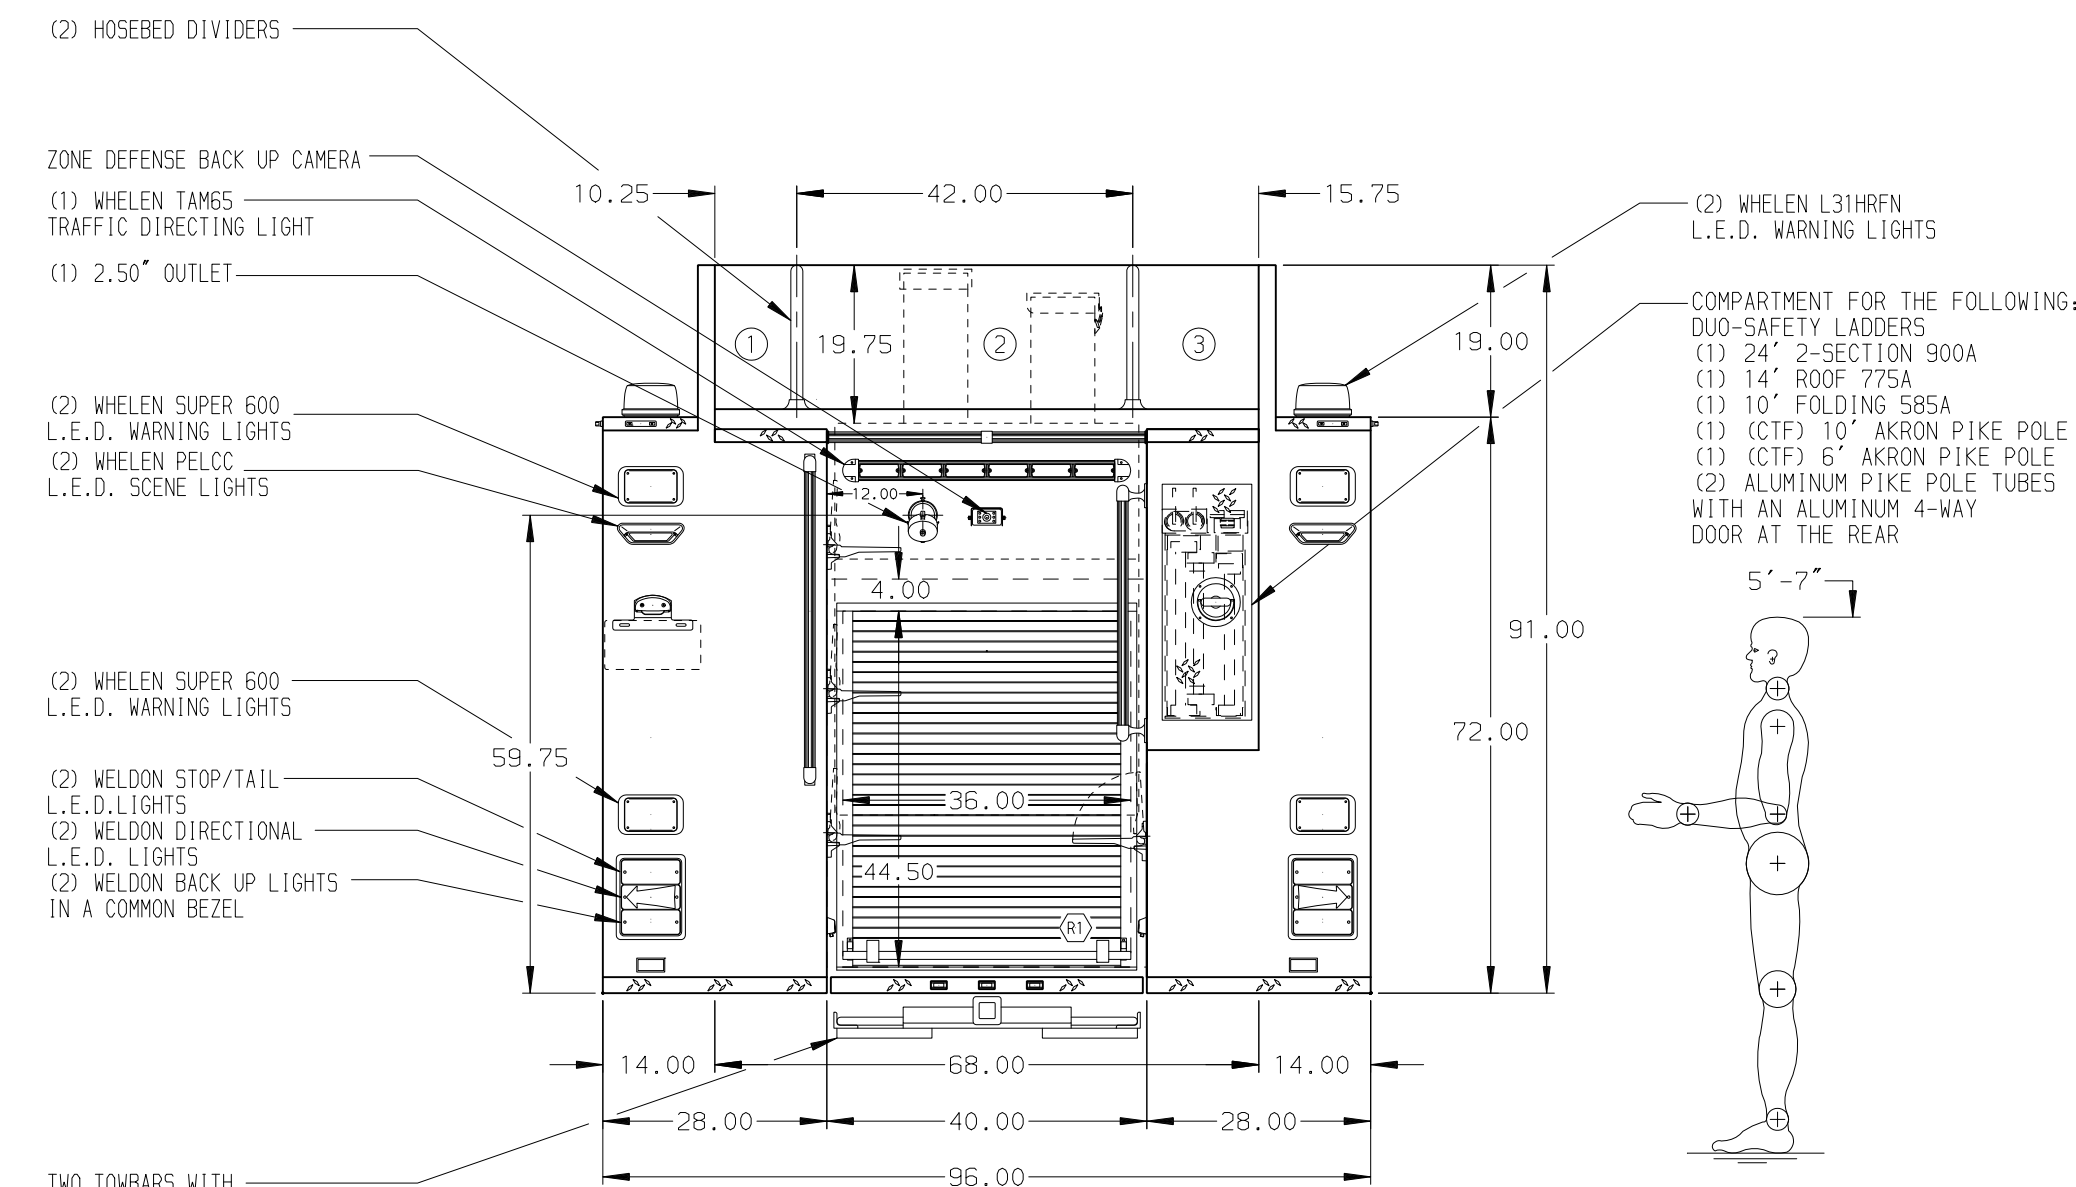

ALUMINUM BODY

NOTE
DIMENSIONS SHOWN ARE APPROXIMATE AND ARE SUBJECT TO MINOR DEVIATIONS AS MAY OCCUR OR BE NECESSARY IN CONSTRUCTION.
MINOR DETAILS NOT SHOWN.

- INTERLUBE LUBE SYSTEM PUMP LOCATED PER SHOP ORDER
- BATTERY CHARGER LOCATED BEHIND DRIVER'S SEAT
- ONE ADJUSTABLE SHELF (FULL DEPTH/FULL WIDTH) IN COMPARTMENT D1, D2, D3, P1, P2, P3 & R1
- ONE FLOOR MOUNTED SLIDE-OUT TRAY IN COMPARTMENT D1, P1 & R1
- SWING-OUT TOOL BOARD WITH PEGBOARD PATTERN IN COMPARTMENT P2
- CIRCUIT BREAKER PANEL IN COMPARTMENT D3
- TWO HANNAY MODEL 2016-17-18 HYDRAULIC REELS LOCATED IN COMPARTMENT D1 WITH A CAPACITY FOR 100' OF 0.25" DUAL HOSE

CUSTOMER APPROVAL					 MANUFACTURING INC.		JOB NO.	29900
APPROVED BY: _____							SCALE	DATE
DATE: _____							1:24	
				CHASSIS DATA	TITLE	1500-D-750 W/20 GAL FOAM CELL, 152" DS FHFD PS FLDR	DRAWN BY	
				MAKE	FOR	(3) XLAWS, GENERATOR, LADDERS BSIDE TANK, DELUGE	AM1	04MAR16
				PIERCE		CITY OF PORTAGE FIRE DEPARTMENT	CHECKED BY	
				MODEL		PORTAGE, MICHIGAN	KBO	04MAR16
	-	-	-		DWG NO.	29900AD	SHEET SIZE	SHEET NO.
REV	DATE	BY	CH	IMPEL			D	1 OF 1